



Aluminum flights

Introduced in 1990, Aluminum flights have proven to be the best cost effective alternative to FRP or wooden flights to date. Made of 6063 T-5 aluminum, the HMAX Aluminum flight is highly resistant to corrosion in use, and does not require special sealants, surface preparation or treatments. The HMAX Aluminum flight features a patented attachment method to the chain which eliminates drilling or notching the flight boards by the use of slotted integral tracks which allows the flight attachments and wear shoes to be mounted and aligned to the flights without the fuss or hassle associated with wooden or fiberglass flights. Environmentally friendly, Aluminum flights are recyclable.

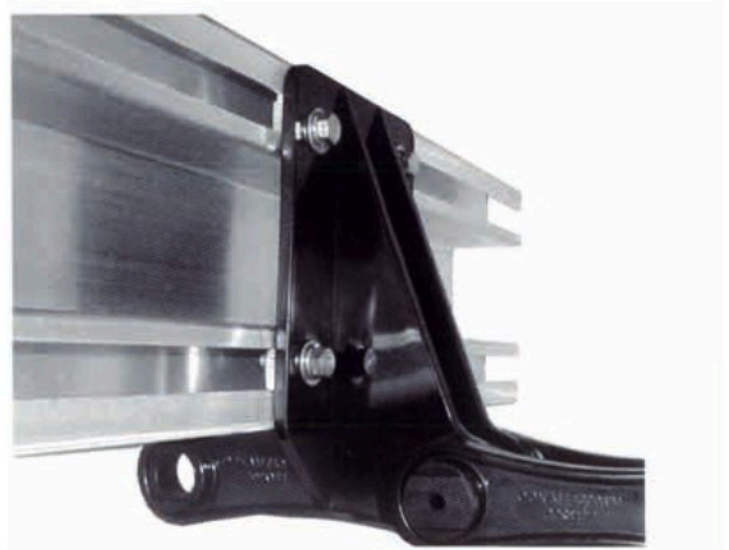

- Available in 8" and 6" sizes, including heavy duty
- Optional neoprene wiper

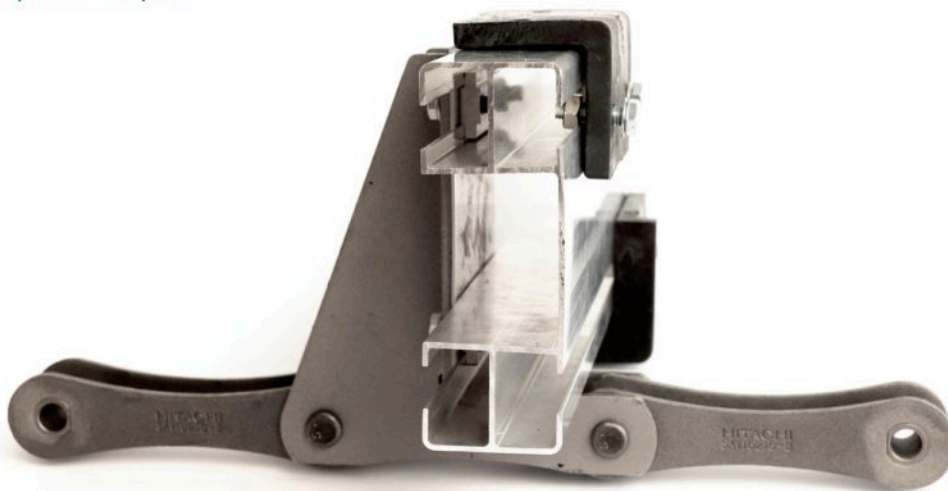

- No filler blocks
- Easiest flight to install
- No drilling or notching required
- Ideal for heavy dirty sludge loads, snail shells, high grit levels

HMAX Aluminum Flights can be used with Non-Metallic, Stainless Steel and Malleable Chains (Metallic chains require additional Polypro insulator plate)

Aluminium flight	Part Number	Material	Units	Height	Dept	Maximum Length	Approx. Weight
8" Standard Duty	HSTD10047	6063 Aluminium	inch	7,02	2,498	26 ft	2,36 lbs/ft
			mm	178,3	63,45	7,92 m	3,5 kg/m
8" Heavy Duty	HSTD10048	6063 Aluminium	inch	7,02	2,498	37 ft	3,6 lbs/ft
			mm	178,3	63,45	11,28 m	5,4 kg/m
6" Standard Duty	HSTD10049	6063 Aluminium	inch	5,125	2,498	26 ft	2,31 lbs/ft
			mm	130,2	63,45	7,92 m	3,4 kg/m
Neoprene Wiper Blade	RSA	Neoprene	inch	2,875	0,125	80 ft	0,4 lbs/ft
			mm	73	3,18	24 m	0,6 kg/m